

DIGITAL DOOR LOCK

Operation Instruction



1 2 3
4 5 6
7 8 9
* 0 #

Password



Card



Mechanical key



Face recognition



Fingerprint



doorbell




C degree cylinder



APP remote

Product Guide

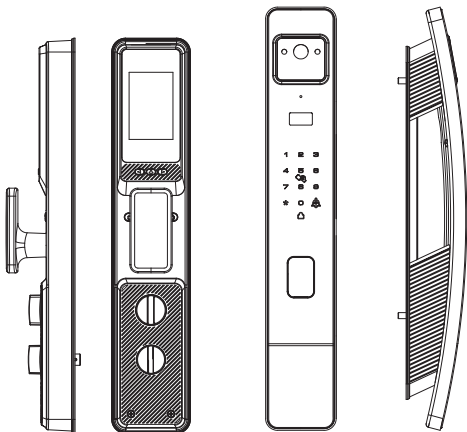

Product specifications

Item	Specifications	Item	Specifications
Voltage	7.4V(lithium battery)	Quiescent current	< 70uA
Emergence power supply	MicroUSB	Working temperature	-10°C~+10°C
User capacity	Fingerprint, password, card, mechanical key face recognition APP remote	Working humidity	20%~93%

User capacity

Type		Quantity	Permission
Admin user	Password	1	Add, delete normal user and feature settings
Normal user	Fingerprint	90	Unlock
	Password		
	Card		
	Face recognition		

SET


1. Initialization stage

The factory admin password is "123456", need to change admin password before using.

Add administrator information




Add user



Voice prompt: press 1 for add face, press 2 for add password, press 3 for add password, press 3 for add card.

Noted: The user ID will start from ID:10.

Delete user



Option

1. Local setting
2. App setting
3. Install

Press 1

1. Add user
2. Delete user
3. Option
4. Add admin

Press 3

1. Func setting
2. Volume setting
3. Lang setting
4. More setting

1. Function setting

1. Func setting
2. Volume setting
3. Lang setting
4. More setting

Press 1

1. Ena Dual vrf
2. Dis alarm
3. Dis Get close

2. Volume setting

1. Func setting
2. Volume setting
3. Lang setting
4. More setting

Press 2

1. Volume up
2. Volume down

3. Time setting

1. Func setting
2. Volume setting
3. Lang setting
4. More setting

Press 4

1. Time setting
2. Record
3. Init

Press 1

Input year

____-____-____
__:__

Add admin

1. Local setting
2. App setting
3. Install

Press 1

1. Add user
2. Delete user
3. Option
4. Add admin

Press 4

1. Face
2. Finger
3. Password
4. Card

App setting

1. Local setting
2. App setting
3. Install




Press 2

1. Add Module
2. Del Module



Press 4

Wireless pairing



1. Download the XHOME app, and allow all permissions.
2. Register and log in the app.
3. Set the lock into wireless pairing stage.
4. Enable the phone's wifi.

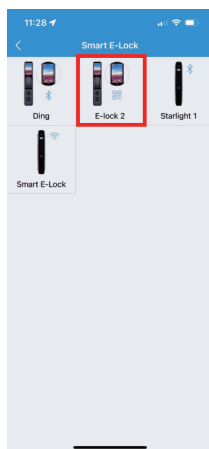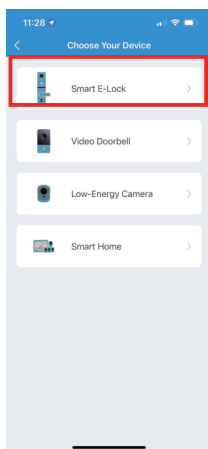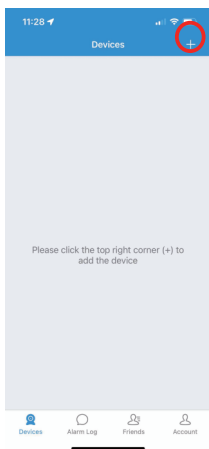

1. Click the top right corner(+) to add device.
2. Select "Smart E-lock"
3. Select " E-lock 2"

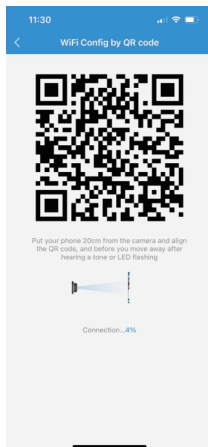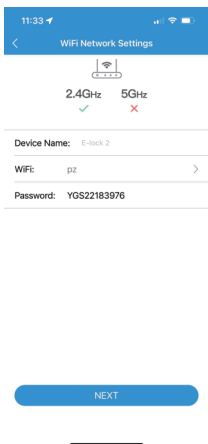


1. Input the Wifi password.
2. Put the phone 20cm from the camera and align the QR code.

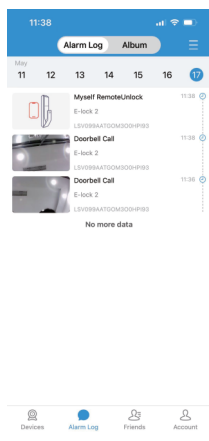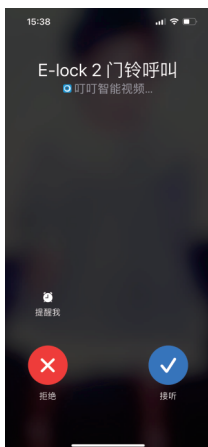

When someone press the doorbell, can check the details on the app.

Set open direction



Press Left for left hand open, press Right for right hand open.

Initialize

Press the "SET" button for 5 seconds and press "#" to confirm.